

R88D-GN□

G-Series servo drive

A compact servo drive family for motion control. Compact size and integrated MECHATROLINK-II motion bus.

- High-response frequency of 1 kHz
- Auto-tuning for easy and quick start-up
- Vibration suppression
- Positioning, speed or torque control
- Separate power and control power supply
- Fast and accurate positioning
- Incremental and absolute encoder






Ratings

- 230 VAC Single-phase 100 W to 1.5 kW (8.62 Nm)

System configuration

G-Series MECHATROLINK-II Servo Drive Configuration

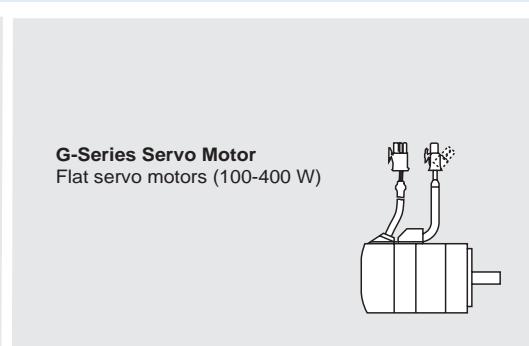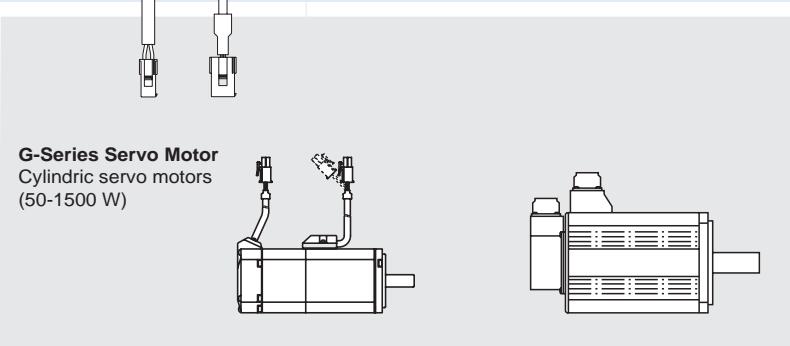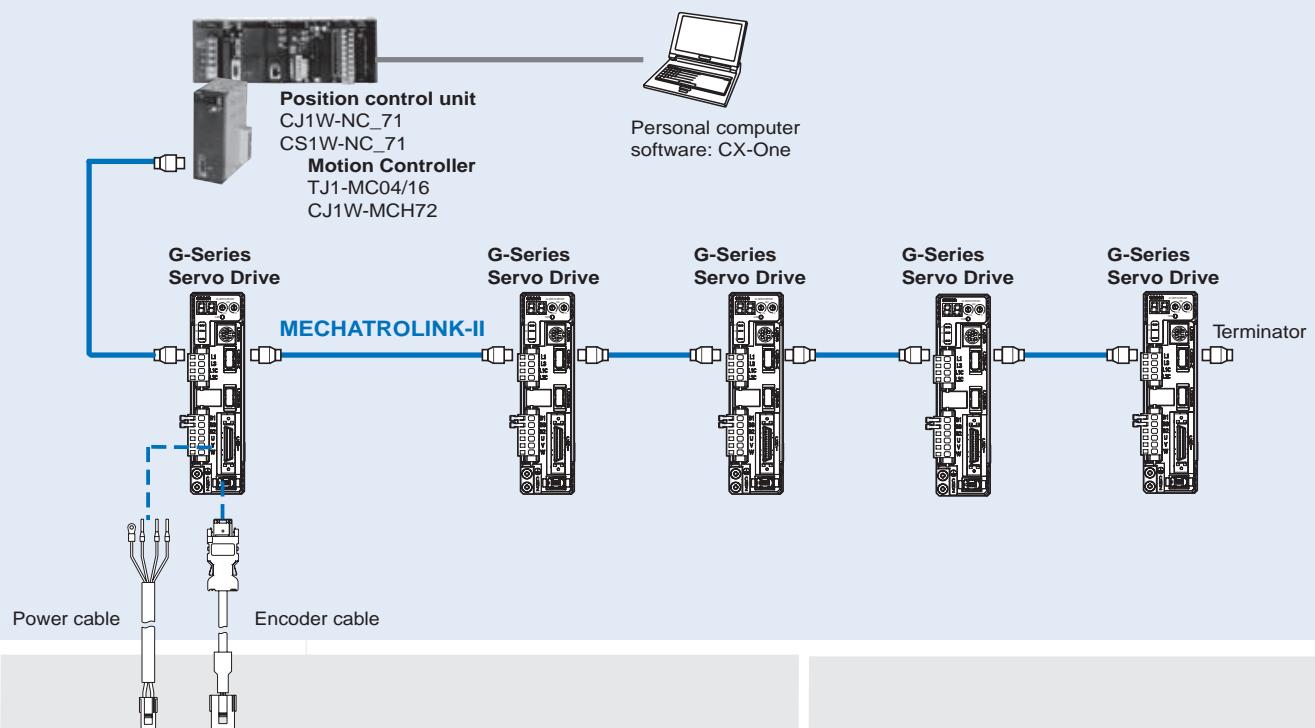

Servo motor supported

Servo motor						G-Series servo drive		
Family	Voltage	Speed	Rated torque	Capacity	Model			
Cylindric	50 - 750 W 	230 V	3000 min ⁻¹	0.16 Nm	50 W	R88M-G05030□-□S2		
				0.32 Nm	100 W	R88M-G10030□-□S2		
				0.64 Nm	200 W	R88M-G20030□-□S2		
				1.3 Nm	400 W	R88M-G40030□-□S2		
				2.4 Nm	750 W	R88M-G75030□-□S2		
	900 - 1500 W 			3.18 Nm	1000 W	R88M-G1K030T-□S2		
				4.77 Nm	1500 W	R88M-G1K530T-□S2		
				4.8 Nm	1000 W	R88M-G1K020T-□S2		
				7.15 Nm	1500 W	R88M-G1K520T-□S2		
				8.62 Nm	900 W	R88M-G90010T-□S2		
Flat	100-400 W 	3000 min ⁻¹	2000 min ⁻¹	0.32 Nm	100 W	R88M-GP10030□-□S2		
				0.64 Nm	200 W	R88M-GP20030□-□S2		
			3000 min ⁻¹	1.3 Nm	400 W	R88M-GP40030□-□S2		
			3000 min ⁻¹	1.3 Nm	400 W	R88D-GN04H-ML2		

Type designation

Servo drive

R88D-GN04H-ML2

G-Series servo drive

N: Network type

Capacity

01	100 W
02	200 W
04	400 W
08	750 W
10	1.0 kW
15	1.5 kW

Model

ML2: MECHATROLINK-II communications

Source voltage

H: 230 V


Servo drive specifications

G-Series servo drive

Servo drive type		R88D-GN□	01H-ML2	02H-ML2	04H-ML2	08H-ML2	10H-ML2	15H-ML2											
Applicable servomotor	R88M-G□	05030□/10030□	20030□	40030□	75030□	G1K020T□	90010T□/1K030T□/1K5□0T□												
	R88M-GP□	10030□	20030□	40030□	-	-	-												
Max. applicable motor capacity	W	100	200	400	750	1000	1500												
Continuous output current	Arms	1.16	1.6	2.7	4.0	5.9	9.8												
Max. output current	Arms	3.5	5.3	7.1	14.1	21.2	28.3												
Input power	Main circuit	For single-phase, 200 to 240 VAC +10 to -15% (50/60 Hz)			For single-phase/three-phase, 200 to 240 VAC +10 to -15% (50/60 Hz)														
Supply	Control circuit	For single-phase, 200 to 240 VAC + 10 to -15% (50/60 Hz)																	
Control method	IGBT-driven PWM method																		
Feedback	Serial encoder (incremental/absolute)																		
Basic specifications	Usage/storage temperature	0 to +55 °C / -20 to 65 °C																	
	Usage/storage humidity	90% RH or less (non-condensing)																	
	Altitude	1000m or less above sea level																	
	Vibration/shock resistance	5.88 m/s ² / 19.6 m/s ²																	
Configuration	Base mounted																		
Approx. weight	Kg	0.8			1.1	1.5	1.7												
Performance	Speed control range	1:5000																	
	Speed variance	During 0 to 100% load ±0.01 max. (at rated speed)																	
	Voltage variance	0% at ±10% of rated voltage (at rated speed)																	
	Temperature variance	0 to 50°C ±0.1% max. (at rated speed)																	
Frequency characteristics		1 kHz																	
Torque control accuracy (reproducibility)		±3% (at 20% to 100% of rated torque)																	
Soft start time setting		0 to 10 s (acceleration time and deceleration time can be set)																	
Position/Speed/torque control mode	MECHATROLINK-II commands (for sequence, motion, data setting/reference, monitor, adjustament and other commands)																		
Command input																			

Servo drive type	R88D-GN□	01H-ML2	02H-ML2	04H-ML2	08H-ML2	10H-ML2	15H-ML2				
Applicable servomotor	R88M-G□	05030□/10030□	20030□	40030□	75030□	G1K020T□	90010T□ / 1K030T□ / 1K5□0T□				
	R88M-GP□	10030□	20030□	40030□	-	-	-				
I/O signal	Sequence input signal		Emergency stop, 3 external latch signals, forward/reverse torque limit, forward/reverse run prohibit, origin proximity, 3 general-purpose inputs								
	Sequence output signal		It is possible to output three types of signals: positioning completed, speed coincidence, rotation speed detection, servo ready, current limit, speed limit, brake release and warning signal								
Integrated functions	Communications	RS-232 communications	Interface	Personal computer							
		Transmission rate	From 2400 to 57600 bps								
		Functions	Parameter setting, status display, alarm display (monitor, clear, history), servo drive data tracing function, test run/autotuning operations, real time trace, absolute encoder setting, default values function								
	MECHATROLINK communications	Communications protocol	MECHATROLINK-II								
		Transmission rate	10 Mbps								
		Data length	17 bytes and 32 bytes								
		Functions	Parameter setting, status display, alarm display (monitor, clear, history), default values function								
	Automatic load inertia detection		Horizontal and vertical axis mode. One parameter rigidity setting.								
	Dynamic brake (DB)		Operates when main power OFF, servo alarm, overtravel or servo OFF								
	Regenerative processing		Built-in regeneration resistor in models from 750 W to 1.5 kW. External regeneration resistor optionally.								
	Overtravel (OT) prevention function		Dynamic brake, disables torque or emergency stop torque during POT and NOT operation								
	Emergency stop (STOP)		Emergency stop input								
	Encoder divider function		Optional division pulses possible								
	Electronic gearing		0.01<Numerator/Denominator<100								
	Internal speed setting function		8 internal speeds								
	Protective functions		Overvoltage, undervoltage, overcurrent, overload, regeneration overload, servo drive overheat								
	Analog monitor Output		The actual servomotor speed, command speed, torque and number of accumulated pulses can be measured using an oscilloscope or other device.								
	Panel operator	Display functions	A 2-digit 7-segment LED display shows the servo drive status, alarm codes, parameters, etc.								
			MECHATROLINK-II communications status LED indicator (COM)								
	Switches		Rotary switch for setting the MECHATROLINK-II node address								

Servo drive part names

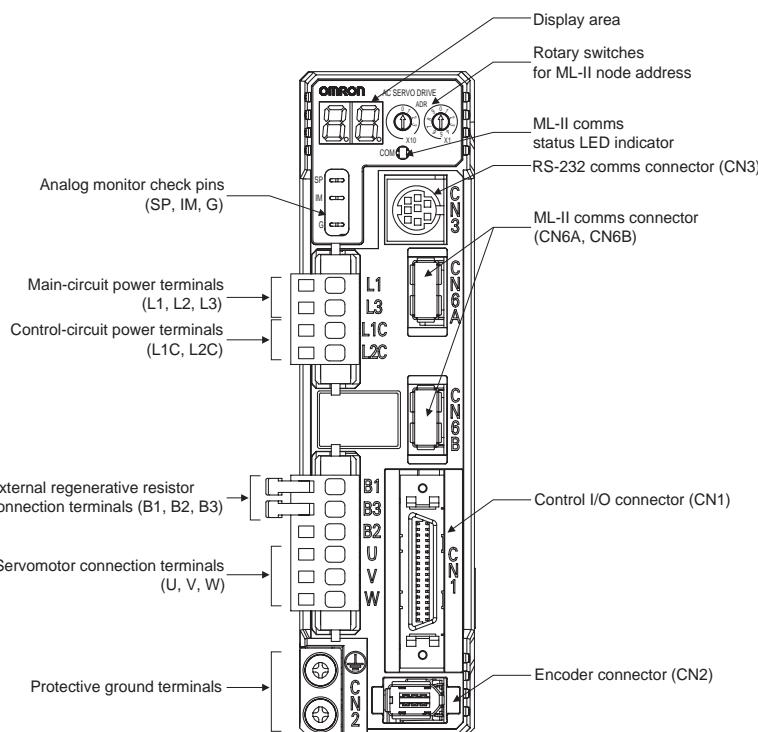

I/O specifications**Main circuit connector (CNA) specifications**

Symbol	Name	Function
L1	Main circuits power supply input	AC power input terminals for the main circuit
L2		
L3		
L1C	Control circuit power supply input	AC power input terminals for the control circuit
L2C		

Servomotor connector (CNB) specifications

Symbol	Name	Function
B1	External regeneration resistor connection terminals	Up to 400 W: If regenerative energy is high, connect an External Regeneration Resistor between B1 and B2.
B2		From 750 W to 1.5kW: Normally B2 and B3 are connected. If regenerative energy is high, remove the short-circuit bar between B2 and B3 and connect an External Regeneration Resistor between B1 and B2.
B3		
U	Servo motor connection terminals	Terminals for outputs to the servomotor.
V		
W		
()	Frame ground	Ground terminal. Ground to 100Ω or less.
()		

I/O signals (CN1) - Input signals

Pin No.	Signal name	Function	
1	+24VIN	Control power supply input for sequence signals: users must provide the +24 V power supply. Allowable voltage range: 12 to 24 VDC	
2	STOP	Emergency Stop Input	Input for emergency stop. Emergency stop function factory default: enable.
3	EXT3		
4	EXT2	External Latch Signals	This external signal input latches the current value feedback pulse counter.
5	EXT1		Minimal signal width must be 1 ms.
22	IN1	External general-purpose Input 0	
6	INO	External general-purpose Input 1	
23	IN2	External general-purpose Input 2	
7	PCL	Forward Torque Limit Input	
8	NCL	Reverse Torque Limit Input	
19	POT	Forward Run Prohibit Input	
20	NOT	Reverse Run Prohibit Input	Forward/ reverse drive rotation overtravel input. Stops servomotor when movable part travels beyond the allowable range of motion.
21	DEC	Origin Proximity Input	Connect the origin proximity input signal in the origin search operation.
34	BAT	Battery backup input for absolute encoder	Connecting pin for the absolute backup battery. Do not connect when a battery is connected to the servomotor encoder cable.
33	BATCOM		

I/O signals (CN1) - output signals

Pin No.	Signal name	Function
15	/ALM	The output turns OFF when an alarm is generated in the Servo drive.
16	ALMCOM	
29	OUTM2	General-purpose output.
30	OUTM2COM	
31	OUTM3	The function for this output is selected by changing the parameter:
32	OUTM3COM	INP1 (Positioning completed), VCMP (Speed conformity signal), TGON (Servomotor rotation speed detection), READY (Servo ready), CLIM (Current limit detection), VLIM (Speed limit detection), BKIR (Brake interlock), WARN (Warning signal)
36	OUTM1	
35	OUTM1COM	

Encoder connector (CN2)

Pin No.	Signal Name	Function
1	E5V	Encoder power supply + 5 V
2	E0V	Encoder power supply ground
3	BAT+	Battery + (used only with absolute encoder)
4	BAT-	Battery - (used only with absolute encoder)
5	PS+	Encoder serial signal input (+phase)
6	PS-	Encoder serial signal input (-phase)
Shell	FG	Shield ground


Serial connector (CN3)

Pin No.	Signal Name	Function
3	TXD	RS232 send data
4	GND	Ground
5	RXD	RS232 receive data


Dimensions

Servo drives


R88D-GN01H-ML2 / GN02H-ML2 (200 V, 100 to 200 W)

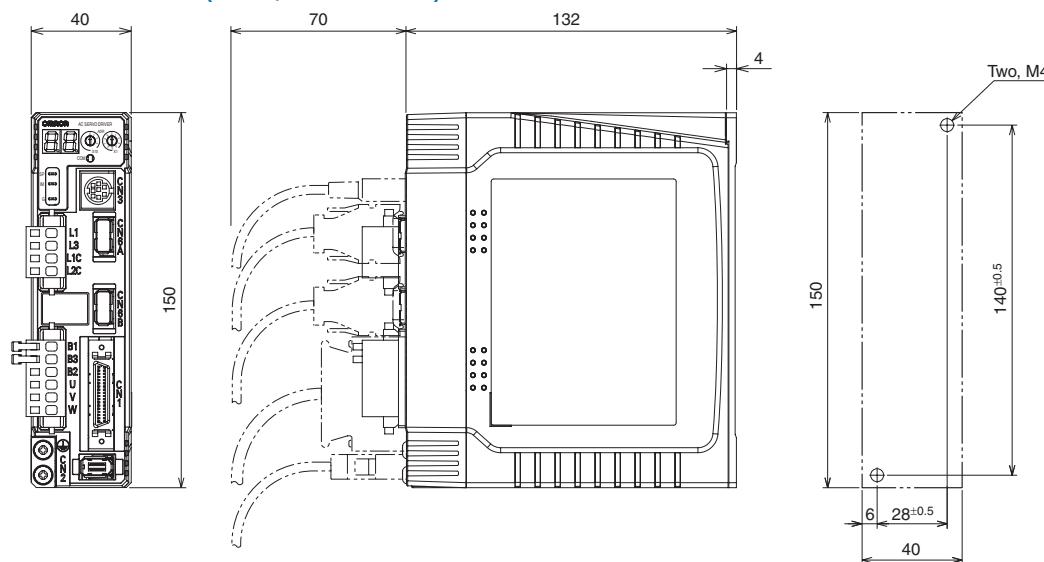


R88D-GN04H-ML2 (200 V, 400 W)

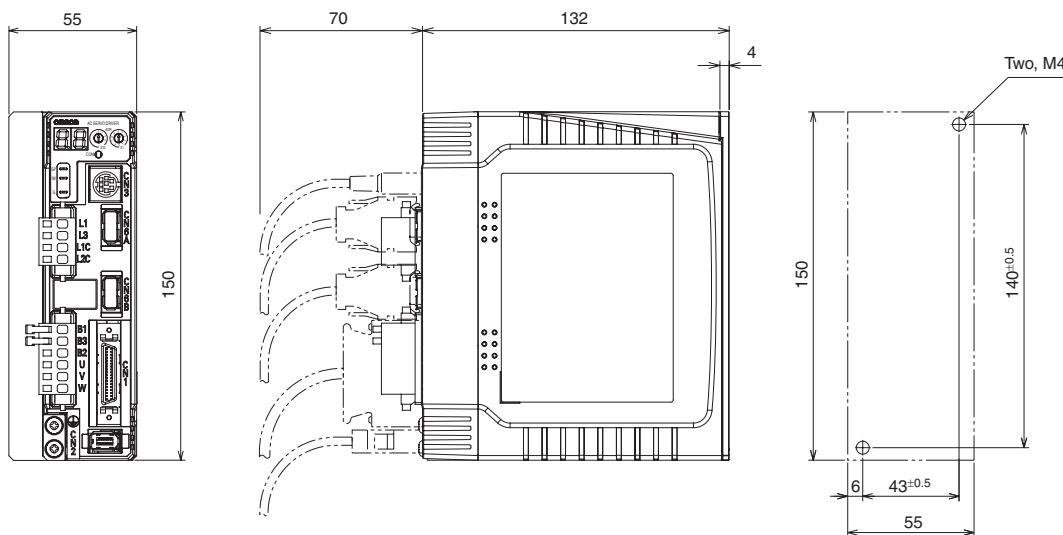


R88D-GN08H-ML2 (200 V, 750 W)

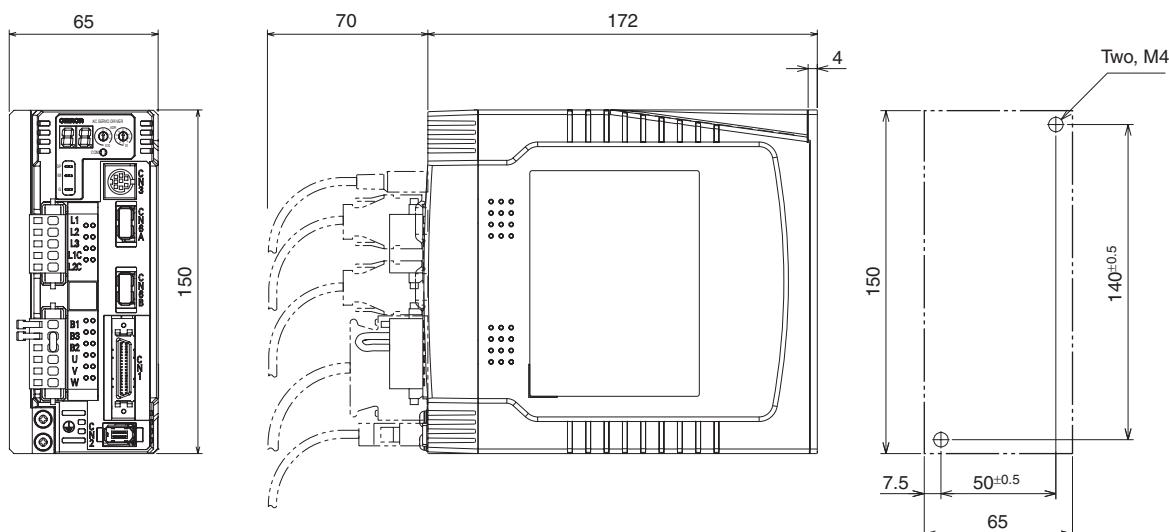

R88D-GN10H-ML2 / GN15H-ML2 (200 V, 1 kW to 1,5 kW)

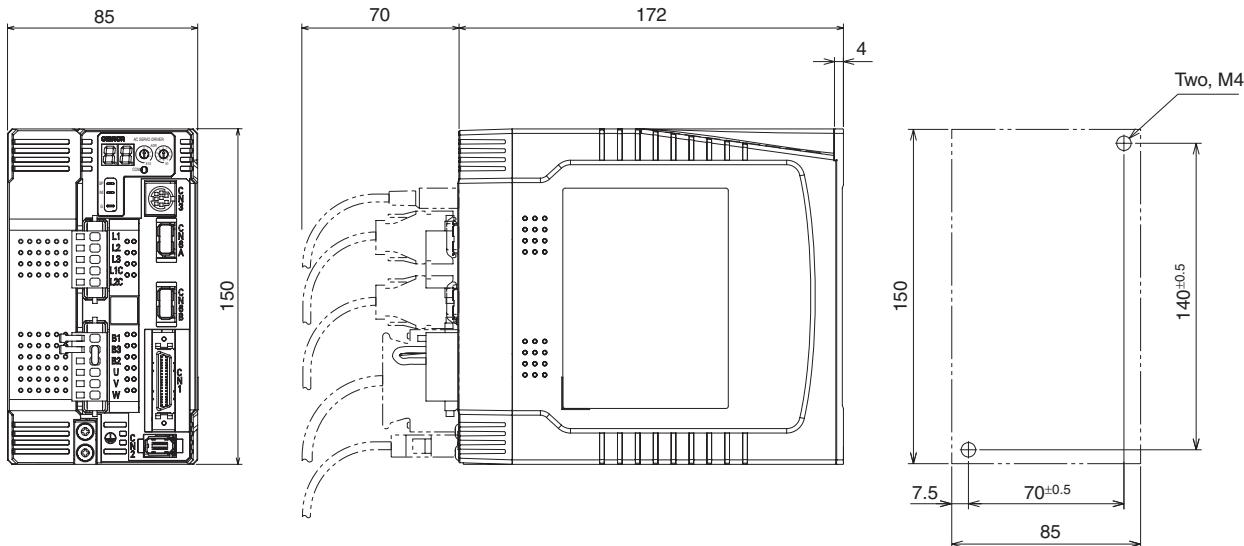


Filters

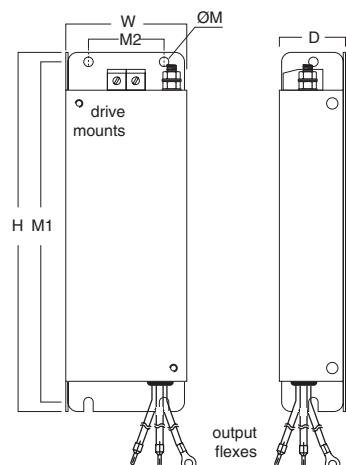

Filter model	Rated current	Leakage current	External dimensions			Mount dimensions		Filter Fixing	Rated voltage
			H	W	D	M1	M2		
R88A-FIK102-RE	2.4 A	3.5 mA	190	42	44	180	20	M4	250 VAC single-phase
R88A-FIK104-RE	4.1 A	3.5 mA	190	57	30	180	30	M4	
R88A-FIK107-RE	6.6 A	3.5 mA	190	64	35	180	40	M4	
R88A-FIK114-RE	14.2 A	3.5 mA	190	86	35	180	60	M4	

Installation

Single-phase, 230 VAC

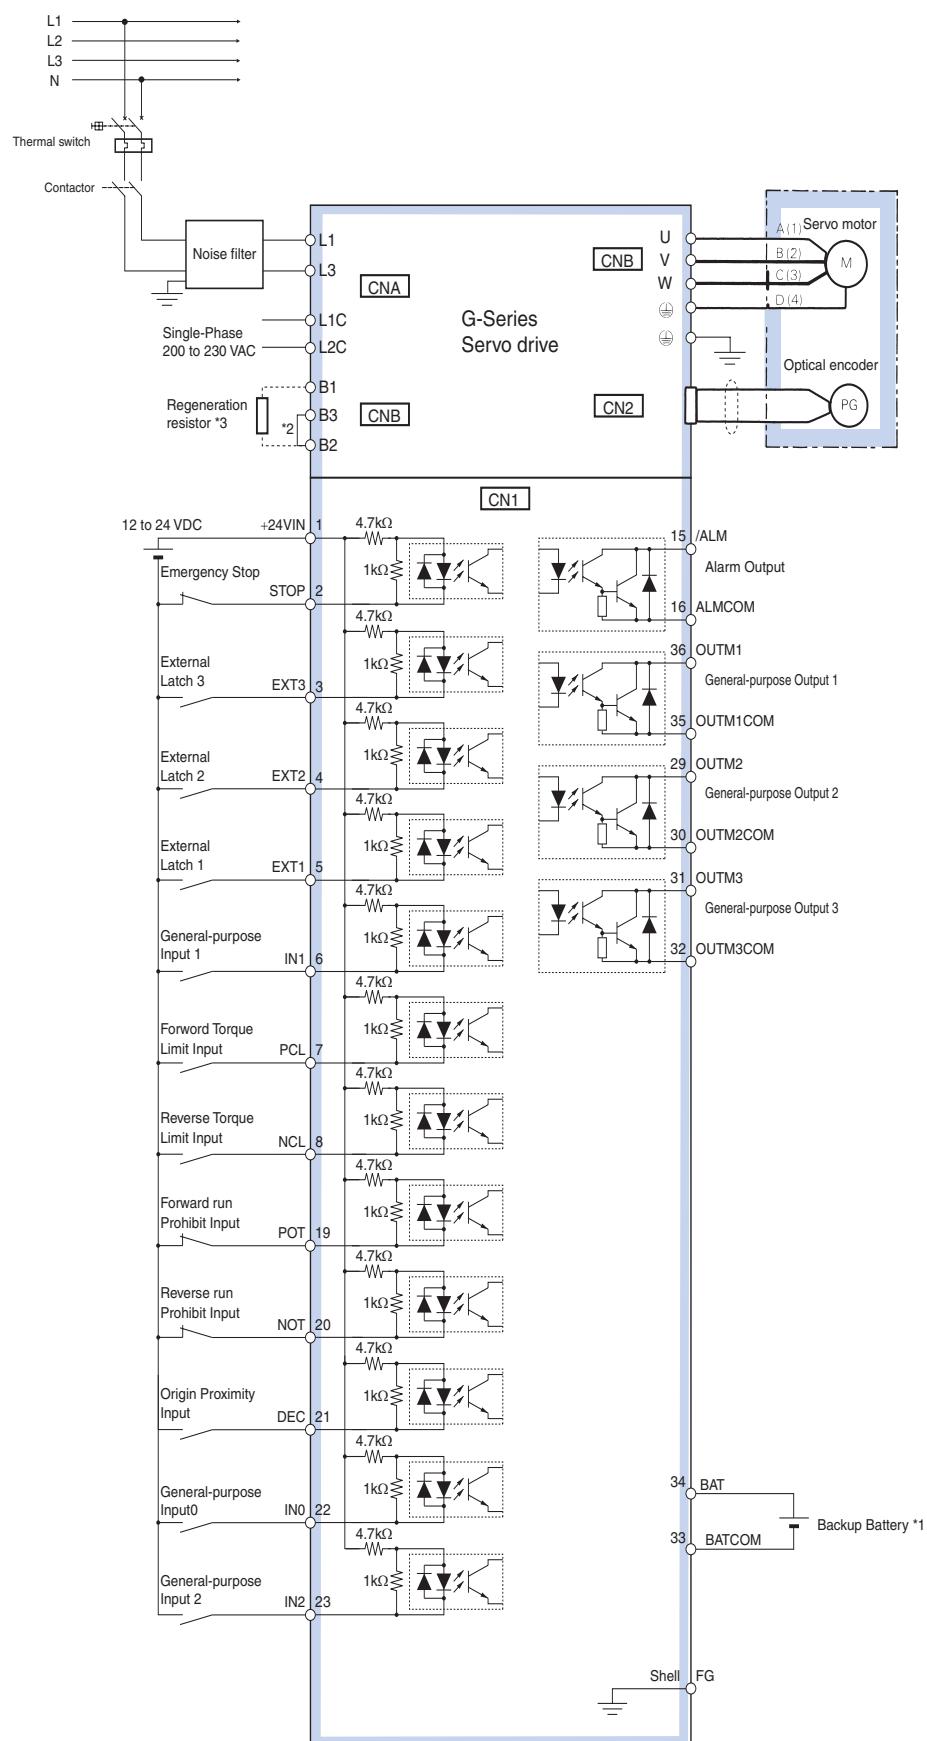


*1 Connect when using an absolute encoder. If a backup battery is connected, an encoder cable with a battery is not required.

*2 Connect B2-B3 for the models with a built-in regeneration resistor (models from 750 W).

*3 If the amount of regeneration is large, connect an external regeneration resistor to B1-B2. For the models from 750 W, disconnect B2-B3.

Ordering information

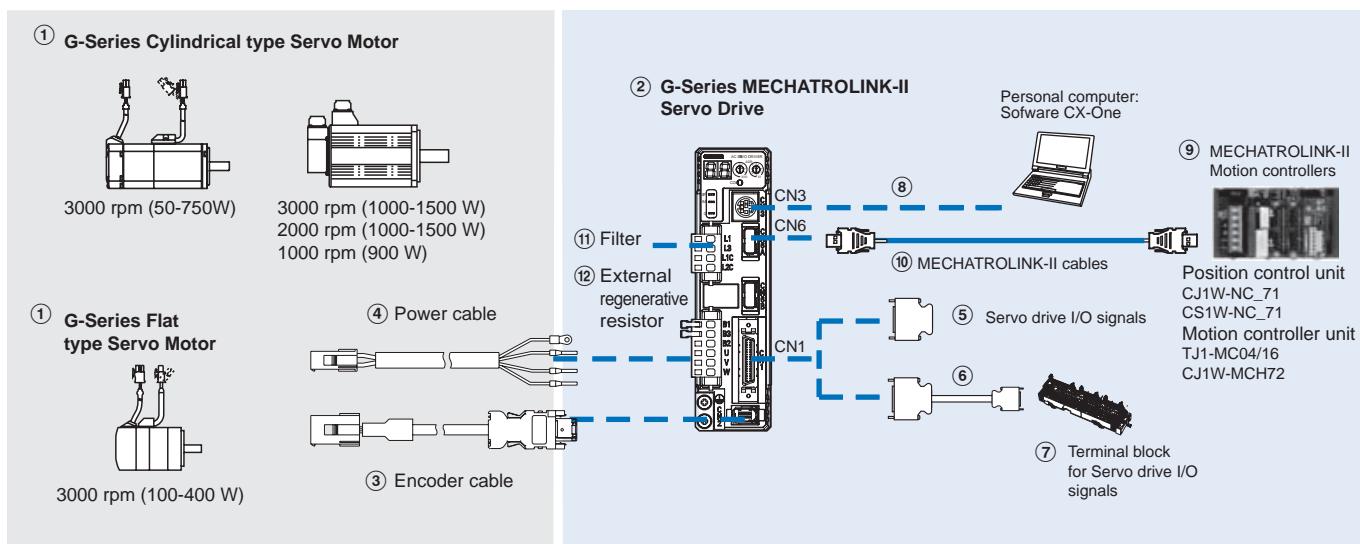

Note: The symbols ①②③④⑤... show the recommended sequence to select the components in a G-Series servo system

Servo motors, power & encoder cables

Note: ①③④ Refer to the G-Series servo motor chapter for servomotor, motor cables or connectors selection

Servo drives

②	1 phase 200 VAC	Specifications	① Compatible rotary servo motors	
			Cylindric type	Flat type
100 W	R88D-GN01H-ML2	R88M-G05030□	R88M-GP10030□	
		R88M-G10030□		
200 W	R88D-GN02H-ML2	R88M-G20030□	R88M-GP20030□	
400 W	R88D-GN04H-ML2	R88M-G40030□	R88M-GP40030□	
750 W	R88D-GN08H-ML2	R88M-G75030□	-	
1.0 kW	R88D-GN10H-ML2	R88M-G1K020T□	-	
1.5 kW	R88D-GN15H-ML2	R88M-G90010T□	-	
		R88M-G1K030T□	-	
		R88M-G1K520T□	-	
		R88M-G1K530T□	-	

Control cables (for CN1)

Symbol	Name	Connect to	Model
⑤	I/O connector kit	Servo drive I/O signals	R88A-CNU01C
⑥	Terminal block cable		XW2Z-100J-B33
			XW2Z-200J-B33
⑦	Terminal block		XW2B-20G4
			XW2B-20G5
			XW2D-20G6

Computer cable (for CN3)

Symbol	Name	Model
⑧	Computer cable RS232	2 m R88A-CCG002P2

MECHATROLINK-II Motion controllers

Symbol	Name	Model
⑨	Trajexia stand-alone motion controller	TJ1-MC04 (4 axes) TJ1-MC16 (16 axes)
	Trajexia-PLC motion controller	CJ1W-MCH72
	Position Controller Unit for CJ1 PLC	CJ1W-NCF71 (16 axes) CJ1W-NC471 (4 axes) CJ1W-NC271 (2 axes)
	Position Controller Unit for CS1 PLC	CS1W-NCF71 (16 axes) CS1W-NC471 (4 axes) CS1W-NC271 (2 axes)

Computer software

Specifications	Model
Configuration and monitoring software tool for servo drives and inverters. (CX-drive version 1.70 or higher)	CX-drive
Complete OMRON software package including CX-drive. (CX-One version 3.10 or higher)	CX-One

MECHATROLINK-II cables (for CN6)

Symbol	Specifications	Length	Model
⑩	MECHATROLINK-II Terminator resistor	-	JEPMC-W6022-E
	MECHATROLINK-II cables	0.5 m	JEPMC-W6003-A5-E
		1 m	JEPMC-W6003-01-E
		3 m	JEPMC-W6003-03-E
		5 m	JEPMC-W6003-05-E
		10 m	JEPMC-W6003-10-E
		20 m	JEPMC-W6003-20-E
		30 m	JEPMC-W6003-30-E

Filters

Symbol	Applicable servodrive	Filter model	Rated current	Leakage current	Rated voltage
⑪	R88D-GN01H□	R88A-FIK102-RE	2.4 A	3.5 mA	250 VAC single-phase
	R88D-GN02H□				
	R88D-GN04H□	R88A-FIK104-RE	4.1 A	3.5 mA	
	R88D-GN08H□	R88A-FIK107-RE	6.6 A	3.5 mA	
	R88D-GN10H□	R88A-FIK114-RE	14.2 A	3.5 mA	
	R88D-GN15H□				

External regenerative resistor

Symbol	Regenerative resistor unit model	Specifications
⑫	R88A-RR08050S	50 Ω, 80 W
	R88A-RR080100S	100 Ω, 80 W
	R88A-RR22047S	47 Ω, 220 W
	R88A-RR50020S	20 Ω, 500 W

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.